

# Standard Outdoor Locker System

Parcel Pending by Quadient's weatherproof outdoor locker systems are designed and engineered to withstand the elements in multiple package management applications that facilitate a seamless and convenient package delivery and collection process at multifamily properties.

Parcel Pending parcel lockers make package management simple, freeing up time and space for both residents and property management.



## Locker system specifications

- 18-gauge double-reinforced cold-rolled steel construction
- Operational conditions: temperature -13° to +122° F - humidity up to 100% non-condensing
- Rain, salt, and wind (category 3 cyclone) resistant
- Control towers feature an industrial-grade touchscreen, a camera for photo capture, a keypad, a scanner supporting 1D and 2D barcode reading, and speakers
- Camera and touchscreen are optimized for full functionality in bright sun, heat and cold conditions
- Kiosk and screen are temperature controlled (air conditioning and heat) for operation in extreme conditions
- Standard awnings provide users additional protection from outdoor elements and come with built-in lights. Short awnings are available as an option for D-series towers only
- Each door features smart package sensors to detect packages and other items
- Locker design is compliant with the Americans with Disabilities Act (ADA) - Every door size is available within the "reachable" range for wheelchair users, and control touchscreen and barcode scanner are also compliant for wheelchair accessibility
- Cloud-based video surveillance is available as an option, with a camera that can be mounted on standard awnings
- Lockers are certified for UL/CSA safety standards - UL/CSA 62368 and UL/CSA 60950
- Lockers are RoHS and REACH compliant




- Stone Grey (RAL7030)
- Brown Grey (RAL7013)
- Jet Black (RAL9005)
- Custom colors or designs available as an option

[www.parcelpending.com](http://www.parcelpending.com) | [sales@parcelpending.com](mailto:sales@parcelpending.com) | (844) 657-4608

# Standard Outdoor Locker System

Towers specifications

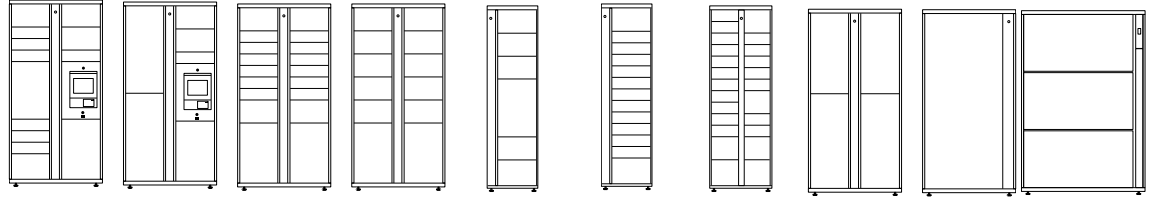

<b>Total Doors</b> (internal size in inches W x D x H) / (Max weight in lbs)	<b>D13</b> control tower	<b>D6</b> control tower	<b>D18</b>	<b>D12</b>	<b>S6</b>	<b>S13</b>	<b>M23</b>	<b>D4</b>	<b>D1</b>	<b>OS-3</b>
<b>Small</b> (13.59 x 23.1 x 4.23) / (33)	7	1	12			11				
<b>Medium</b> (13.59 x 23.1 x 9.25) / (33)	4	2	4	10	5	2				
<b>Large</b> (13.59 x 23.1 x 24.33) / (44)	2	1	2	2	1					
<b>X-Large</b> (13.59 x 23.1 x 36.85) / (44)		2						4		
<b>H-Small</b> (7.39 x 23.1 x 4.23) / (33)							17			
<b>H-Medium</b> (7.39 x 23.1 x 9.25) / (33)							6			
<b>Ultra</b> (30.42 x 22.06 x 74.33) / (220)									1	
<b>OS-3</b> (44.9 x 22.4 x 24) / (220)										3
Weight with no awning (lbs)	434	357	403	360	203	295	388	309	278	419
Weight with standard awning (lbs)	485	408	454	410	231	324	421	359	329	485
Weight with short awning (lbs)	463	386	432	388	n/a	n/a	n/a	337	307	n/a

	Tower measurements in inches without awning (W x D x H*)	Tower measurements in inches with awning (W x D x H*)	Tower measurements in inches with short awning (W x D x H*)
<b>D13, D6, D18, D12, D4, D1</b>	39.5 x 24 x 79.7~80.5	39.5 x 42.4 x 86.3~87.1	39.5 x 28.3 x 82.9~83.7
<b>S13, S6</b>	22.5 x 24 x 79.7~80.5	22.5 x 42.4 x 86.3~87.1	n/a
<b>M23</b>	27 x 24 x 79.7~80.5	27 x 42.4 x 86.3~87.1	n/a
<b>OS-3</b>	53.7 x 24 x 79.7~80.5	53.7 x 42.4 x 86.3~87.1	n/a

\* Includes slight adjustments to tower feet for balancing and leveling purposes.